PPFF25EPMVAZ

PB-Module with one double sensor Pepperl + Fuchs NBN3-F25F-E8-P
in PB-Housing ø80 x 97 mm

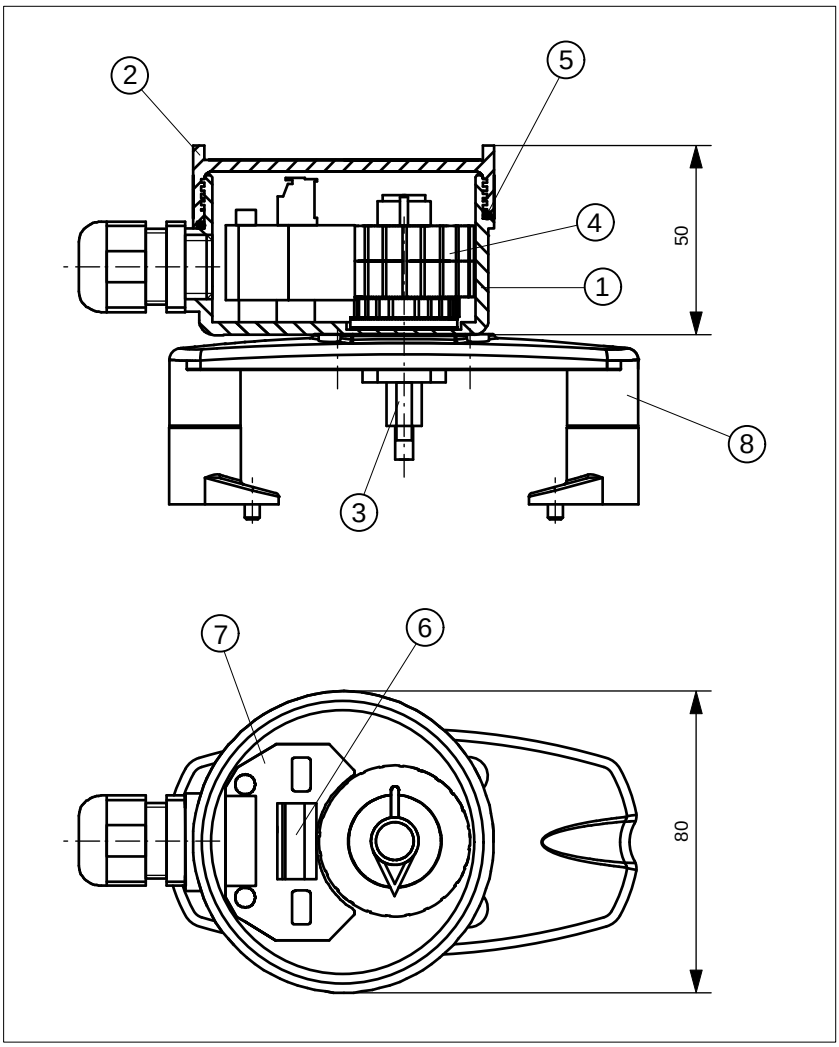

TECHNICAL DATA

Manufacturer:	Pepperl+Fuchs
Type:	NBN3-F25F-E8-P Double sensor, PNP Normally open contact
Operating distance:	3 mm
Operating voltage:	10 ... 30 V DC
Switch. frequency:	0 ... 500 Hz
Output:	short-circuit proof, inverse-polarity protection
Operating current:	0 ... 200 mA
Temperature:	-25 ... +70°C
Signal:	LED, green + yellow
Ingress protection:	IP 60 (Sensor) IP 65 (Housing)
Switch. precision:	< 0,5°
Housing base:	Vestamid, black
Housing cover:	Makrolon, clear
Sealing:	EPDM
System connection:	pluggable cable clamps and cable gland M20x1,5

OBJECT LIST

Pos.	Pcs.	Description	Material
1	1	Housing base	Vestamid
2	1	Housing cover	Macrolon
3	1	TCR-Axis	POM
4	1	Switch cam system	POM A2
5	1	O-Ring sealing	EPDM
6	1	Cable clamp, 4-pole	-
7	1	P+F NBN3-F25F-E8-P	-
8	1	Bracket size 1-4	A2 or PA

WIRING DIAGRAM

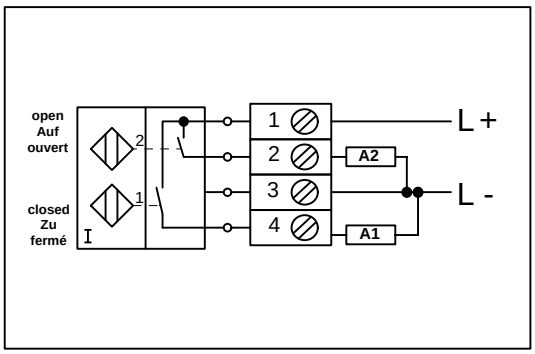

erstellt: 20.02.08 / SHAM
geprüft: 20.02.08 / RT

Im Katzentach 16-18
D-76275 Ettlingen

Telefon: 07243-59 31-0
Telefax: 07243-59 31-31

e-Mail: info@rotech.de
Internet: www.rotech.de

ROTECH SYSTEMKOMPONENTEN